


2023 NEW SKANDIC® LE

Additional in-season options for
hardworking off-trail performance
and towing capacity.

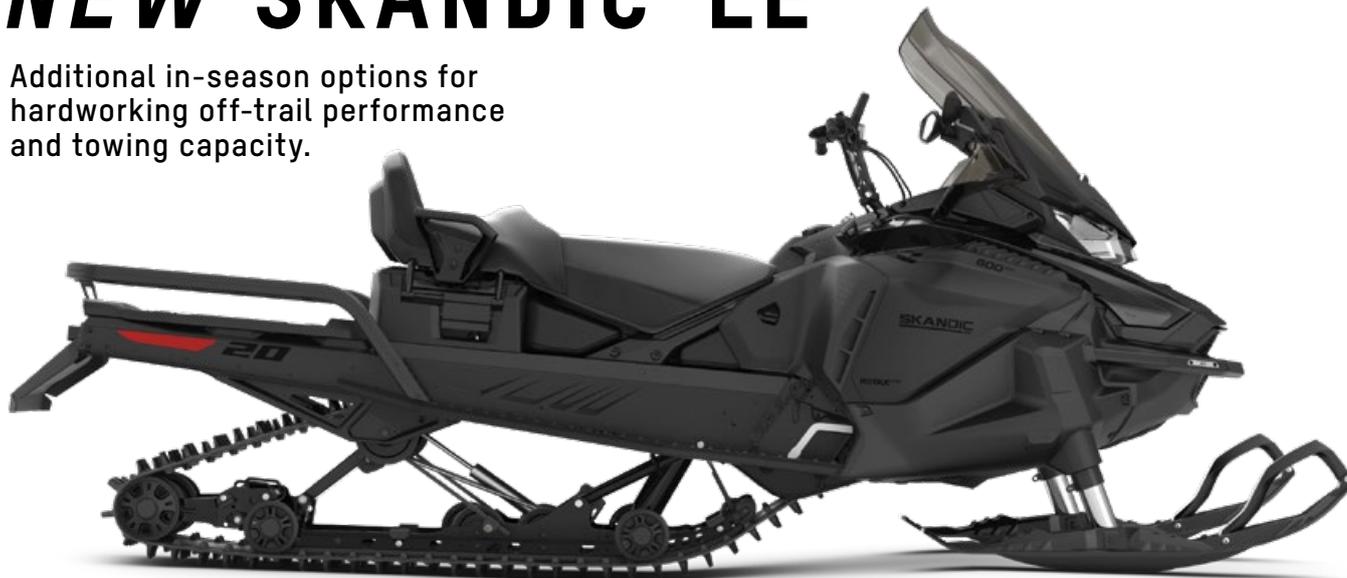

// WHAT'S NEW

- Available with 20 in. or 24 in. track options

// PACKAGE HIGHLIGHTS

- Rotax® engines available: 900 ACE™ engines
- HP6¹ rear shock
- Multi-LinQ plate with 56.7 kg cargo capacity
- LTS telescopic front suspension
- SC¹-5U articulating rear suspension with locking mechanism (no tool required)
- Removable passenger seat with grips
- 23 in. ultra-high windshield with side deflectors
- Hitch
- Air radiator with fan
- Standard electric start
- Deep-snow running boards with large openings
- Easy-shift transmission (H-L-N) with electro-mechanical reverse
- Pivoting mirrors
- pDrive™ clutch
- Low handlebar strap
- Pilot™ 7.4 skis

SKANDIC LE
900 ACE SHOWN

ROTAX ENGINE

	900 ACE
Engine details	Liquid-cooled, four-stroke D.O.H.C., dry sump
Cylinders -	3
Displacement	899 cc
Bore - Stroke (mm)	73 - 69.7
Carburation	EFI
Fuel type - Octane	Unleaded - 95
Fuel tank (L/US gal)	42/11.1
Oil tank capacity (L/qt)	3.3/3.5

POWERTRAIN

Drive clutch	pDrive
Driven clutch	QRS
Drive sprocket pitch	73 mm/2.86 in.

DIMENSIONS

Overall vehicle length	3,222 mm/126.9 in.
Overall vehicle width	1,088 mm/42.8 in.
Overall vehicle height	1,515 mm/59.6 in.
Ski stance	889 mm/35 in.
Track	Silent Cobra WT: 154 x 20 x 1.5 in.
(Length x Width x Profile)	Silent Cobra SWT: 154 x 24 x 1.5 in.

SUSPENSION

Front suspension	LTS
Front shock	Motion Control
Front suspension travel	150 mm/5.9 in.
Rear suspension	SC-5U
Center shock	Motion Control
Rear shock	HPG
Rear suspension travel	239 mm/9.4 in.

COLOR

Black 

FEATURES

Platform	REV® Gen4
Skis	Pilot 7.4
Seating	2-up modular with underseat storage
Handlebar	Standard with J-hooks/Grab handle
Riser block height	145 mm/5.7 in.
Starter	Electric
Reverse	Electro-mechanic
Air radiator	High-efficiency w/ fan
Brake system	Brembo ¹
Heated throttle lever/grips	Standard (driver only)
Gauge type	4.5 in. digital display
Windshield	585 mm/23 in. with mirrors
Runner - Carbide	Square 3/8 in. - 14 in.
Bumpers (front/rear)	Heavy Duty/No

ski-doo

